
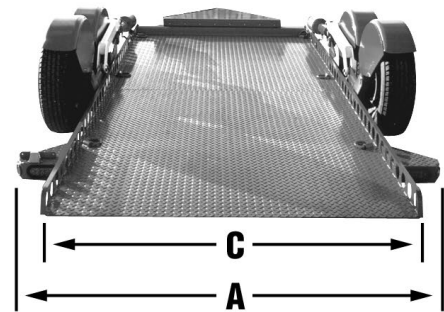


Lo Riser Specifications

Model IPT4-516 Inclining Platform Trailer

Dimensions and Loads

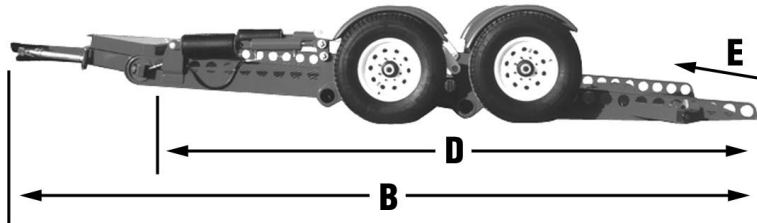

Dimensions:

A = 8' 6" (102")
B = 22' 1" (265.0")
C = 6' 2" (74")
D = 16' (192")
E = 4 Degree Load Angle
Clearance of deck at transport height = 11"

Loads:

425 lbs. Tongue Load (Trailer)
1,075 lbs. Tongue Load (Cargo)
1,500 lbs. Total Tongue Load
768 lbs. Wheel Load (Trailer)
2,232 lbs. Wheel Load (Cargo)
3,000 lbs. Total Wheel Load
Two (2), 6,000 lbs. Axles

Specifications and Features (Base Trailer)

Ground to Travel Height
GVWR 13,500 lbs.
Payload Maximum 10,000 lbs.
Trailer Weight 3,500 lbs.
3 to 1 Payload to Trailer Weight Ratio
Tires ST235/80R16LRE (3,520 lbs. Capacity Each)
Steel Wheels
Cylinders 3-1/2" Diameter x 12" Stroke
Adjustable Ball Hitch 2-5/16" Diameter
Ramp Built-in
Larger Lockable Storage Compartment
Controlled Descent
Tie Down Rail Built-in

DC Electric/Hydraulic Pump
Tongue Jack
Six (6) "D" Rings
Breakaway Kit with Chains
Electric Brakes Both Axles
LED Lighting with 7 Pin Connector
Single Pin Grounded 12 VDC Power Cable
Control Switch with Cable
HSLA Steel Construction (No Angle or Channel Iron)
Grade 55 - 3/16" Diamond Plate Flooring
Combination Hydraulic/Rubber Suspension

Options

On Board Power – includes Battery, Charger & Maintainer.....12784
Cargo Winch 8,000 lbs.12785
Pintle Hitch (2-1/2" Lunette)12782
Remote Power Option12783
(Cord in addition to On Board Power)

Spare Tire, Wheel & Carrier 12544
Special Paint 12789
(Black, Yellow or Blue Standard)