
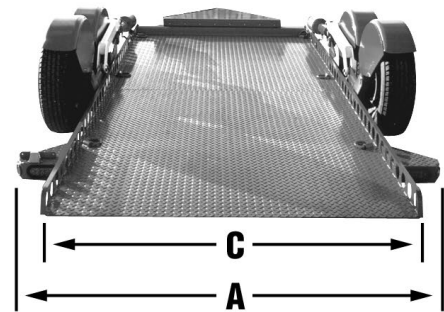


Lo Riser Specifications

Model IPT4-616 Inclining Platform Trailer

Dimensions and Loads

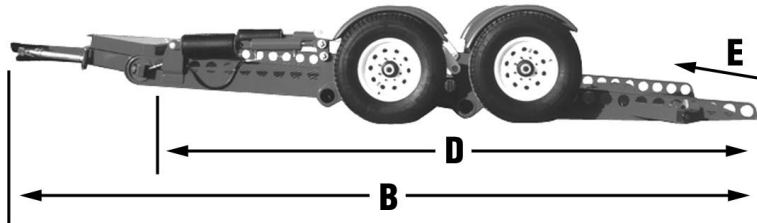

Dimensions:

A = 8' 6" (102")
 B = 22' 1" (265.0")
 C = 6' 2" (74")
 D = 16' (192")
 E = 4 Degree Load Angle
 Clearance of deck at transport height = 11"

Loads:

425 lbs. Tongue Load (Trailer)
 1,075 lbs. Tongue Load (Cargo)
 1,500 lbs. Total Tongue Load
 768 lbs. Wheel Load (Trailer)
 2,732 lbs. Wheel Load (Cargo)
 3,500 lbs. Total Wheel Load
 Two (2), 7,000 lbs. Axles

Specifications and Features (Base Trailer)

Ground to Travel Height
 GVWR 15,500 lbs.
 Payload Maximum 12,000 lbs.
 Trailer Weight 3,500 lbs.
 3.5 to 1 Payload to Trailer Weight Ratio
 Tires ST235/80R16LRE (3,520 lbs. Capacity Each)
 Steel Wheels
 Cylinders 3-1/2" Diameter x 12" Stroke
 Adjustable Ball Hitch 2-5/16" Diameter
 Ramp Built-in
 Larger Lockable Storage Compartment
 Controlled Descent
 Tie Down Rail Built-in

DC Electric/Hydraulic Pump
 Tongue Jack
 Six (6) "D" Rings
 Breakaway Kit with Chains
 Electric Brakes Both Axles
 LED Lighting with 7 Pin Connector
 Single Pin Grounded 12 VDC Power Cable
 Control Switch with Cable
 HSLA Steel Construction (No Angle or Channel Iron)
 Grade 55 - 3/16" Diamond Plate Flooring
 Combination Hydraulic/Rubber Suspension

Options

On-Board Power – includes Battery,
 Charger & Maintainer 12784
 Cargo Winch 8,000 lbs. 12785
 Pintle Hitch (2-1/2" Lunette) 12782
 Remote Power Option 12783
 (Cord in Addition to On Board Power)

Spare Tire, Wheel & Carrier..... 12544
 Special Paint 12789
 (Black, Yellow or Blue Standard)