

Sliding Axle Trailer



Optional swing-out flashers



Safety brake stop



Multiple types of tie downs





4 I-beam main frame





3/4" Approach for easy loading



323 W Quince St • Mitchell SD 57301 • (605) 996-5571 • FAX (605) 996-5572 • 1-800-232-5682

web site: www.traileze.com • email: sales@traileze.com

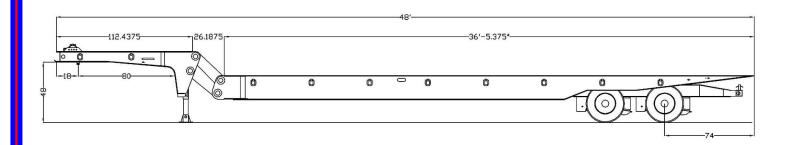



GENERAL SPECIFICATIONS:

TE701 – 70,000 lbs. Distributed /

40,000 lbs. Concentrated in 10'

TE801 - 80,000 lbs. Distributed /

50,000 lbs. Concentrated in 10'

DIMENSIONS:

Overall Length: 40' to 53'
Main Bed Length: 28'-5" to 41'-5"

Upper Deck Length: 112" 8'-6"

Approach Ramp: Steel knife edge

Loaded Deck Height: 37"
Axle Slide on 44' to 47': 13'
Axle Slide on 48' to 53': 15'
Swing Clearance: 80"
King Pin Setting: 18"

LOAD ANGLE: 6 3/4 to 8 degrees

FRAME: All hi-tensile steel I-beams. 4-Beam design.

PLATFORM: 1 1/2" Oak decking with crossmembers on 12" centers.

STAKEPOCKETS: on 4' centers with 4 Gotcha's across

the rear.

OPERATION: The main bed is tilted hydraulically and the hinged slope forms a straight ramp to the upper deck which

remains flat on the fifth wheel at all times.

AXLES: (2) 22,500 lbs.

BRAKES: S-Cam air brakes activated 12 1/4" x 7 1/2". ABS w/auto slack adjusters and spring brakes on all axles.

WHEELS: (8) 6.75 x 17.5 10-Hole steel disc.

TIRES: (8) 235/75R x 17.5 radials.

PARK STANDS: Two-speed landing gear.

SUSPENSION: Air ride.

ELECTRICAL: ICC D.O.T. standard sealed light system

w/mid-ship turn signal.

WINCH: 12,000 lb. hydraulic with cord type remote

control.

PAINT: Sandblasted & clean metal primed

and painted 2-part polyurethane electro statically applied. **OPTIONS:** *Many available!!*

WARRANTY – Limited 5-Year Major Structural Warranty Over 50 Years Building Trailers
To Work Like You Do!!

