


Lo Riser Specifications Model IPT4-816 Inclining Platform Trailer

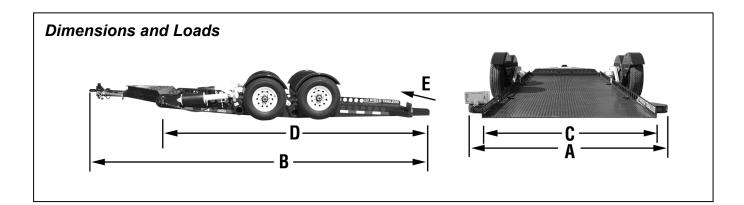

Dimensions:

A = 8' 6" (102")

B = 22' 1" (265.0")

C = 6' 2'' (74'')

D = 16' (192")

E = 4 Degree Load Angle

Clearance of deck at transport height = 11"

Loads:

425 lbs. Tongue Load (Trailer) 3,300 lbs. Tongue Load (Cargo) 3,725 lbs. Total Tongue Load 825 lbs. Wheel Load (Trailer) 3,300 lbs. Wheel Load (Cargo) 4,125 lbs. Total Wheel Load Two (2), 8,000 lbs. Axles

Specifications and Features (Base Trailer)

Ground to Travel Height

GVWR 19,725 lbs.

Payload Maximum 16,000 lbs.

Trailer Weight 3,725 lbs.

4 to 1 Payload to Trailer Weight Ratio

Tires LT235/85R16LRG (4,805 lbs. Capacity Each)

Steel Wheels

Cylinders 3-1/2" Diameter x 12" Stroke

2 -1/2" Pintle Hitch

Ramp Built-in

Larger Lockable Storage Compartment

Controlled Descent

Tie Down Rail Built-in

DC Electric/Hydraulic Pump

Tongue Jack

Six (6) "D" Rings

Breakaway Kit with Chains

Electric Brakes Both Axles

LED Lighting with 7 Pin Connector

Single Pin Grounded 12 VDC Power Cable

Control Switch with Cable

HSLA Steel Construction (No Angle or

Channel Iron)

Grade 55 - 3/16" Diamond Plate Flooring Combination Hydraulic/Rubber Suspension

Options

On-Board Power – includes Battery,	Spare Tire, Wheel & Carrier 12543
Charger & Maintainer12784	Special Paint12789
Cargo Winch 8,000 lbs12785	(Black, Yellow or Blue Standard)
Remote Power Option12783	25K Ball Hitch 2 5/16" Coupler 15347
(Cord in addition to On-Board Power)	